


Dual Fiber 40CH C21-C60 DWDM MUX DEMUX, With 1310nm and Monitor Port, LC/UPC, 1U Rack



The 40ch DWDM MUX DEMUX is designed by FIBERWDM, wavelength from C21 to C60(1560.61nm~1529.55nm), in accordance with the ITU-T G.694.1 100GHZ grid, it maximizes the capacity of the C-band range.

The 40ch DWDM with 1310nm port is totally passive DWDM device, and support low insertion loss( wavelength ports<3.5dB; 1310nm port<0.8dB). And it conjunct with The DWDM amplifiers and DCM device, the 40ch DWDM transfer system can support a long distance transmission.


Product Panel

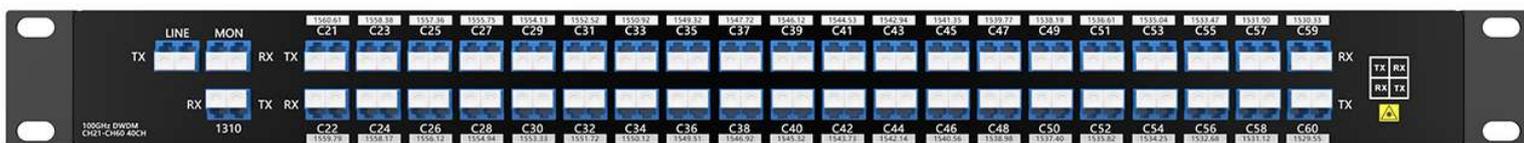

40CH DWDM MUX DEMUX

- ◆ 1310nm port can support 1G LX/SX, 10G LR, 40G ER4/LR4, 100G LR/ER4/LR4/ZR4; it for Existing Legacy Traffic.
- ◆ Mon port is for network link monitoring or power monitoring, easy troubleshooting without affecting traffic.

Line Link

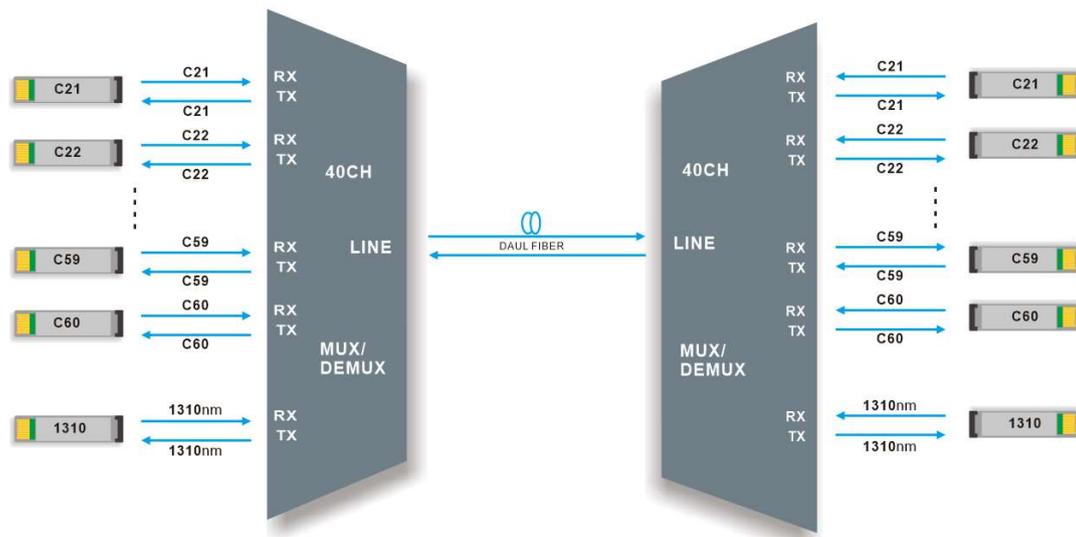

40CH DWDM MUX DEMUX Dual fiber transmission

40 Channels DWDM MUX DEMUX and with 1310nm Port, supports 40 channels difference business in two optical fiber for point-to-point transmission.

It works in Broadcast and TV, IDC, finance, government, cloud, massive data and other industries.

Product Specification

<b>Wavelength</b>	40channels C21-C60	<b>Channel Spacing</b>	100GHz (0.8nm)
<b>Channel Passband</b>	±0.11nm	<b>Technology</b>	AAWG (Gaussian)
<b>Insertion Loss</b>	≤ 3.5dB	<b>Link Loss</b>	≤ 7dB
<b>1310nm Port Pass Band Width</b>	1260nm~1360nm	<b>Center Wavelength Accuracy</b>	±0.05nm
<b>Insertion Loss @ 1310 port</b>	≤ 0.8dB	<b>Insertion Loss @ 1% Mon</b>	≤ 26dB
<b>Return Loss</b>	≥ 40dB	<b>Directivity</b>	≥ 40dB
<b>Polarization Mode Dispersion</b>	≤ 0.1ps	<b>Polarization Dependent Loss</b>	≤ 0.5dB
<b>Channel Isolation</b>	Adjacent ≥ 25dB Non-adjacent ≥ 29dB	<b>Temperature</b>	Operating -5 to 65°C Storage -40 to 85°C
<b>Net Weight</b>	3.5KG	<b>Dimensions (HxWxD)</b>	44*440*230mm

Note: Specified with connectors.

**Package Information**



**19" Inch 1U Rack**

**Order Information**

Product No.	Product description
DMD40-1U01-C2160-31M	DWDM MUX DEMUX 40CH (C21-C60) With 1310nm and Monitor Port, Dual fiber, LC/UPC , 1U Rack

**Note: We Support Customized Design, please contact us by email.**